


B-8250-WN / B-8250-WN-G / B-8265 / B-8265-G CMR


e▶ H.25 e▶ H.26

• Reguliuojamas turėklas
šoniniam montavimui.


• Adjustable railing system, side
installation.

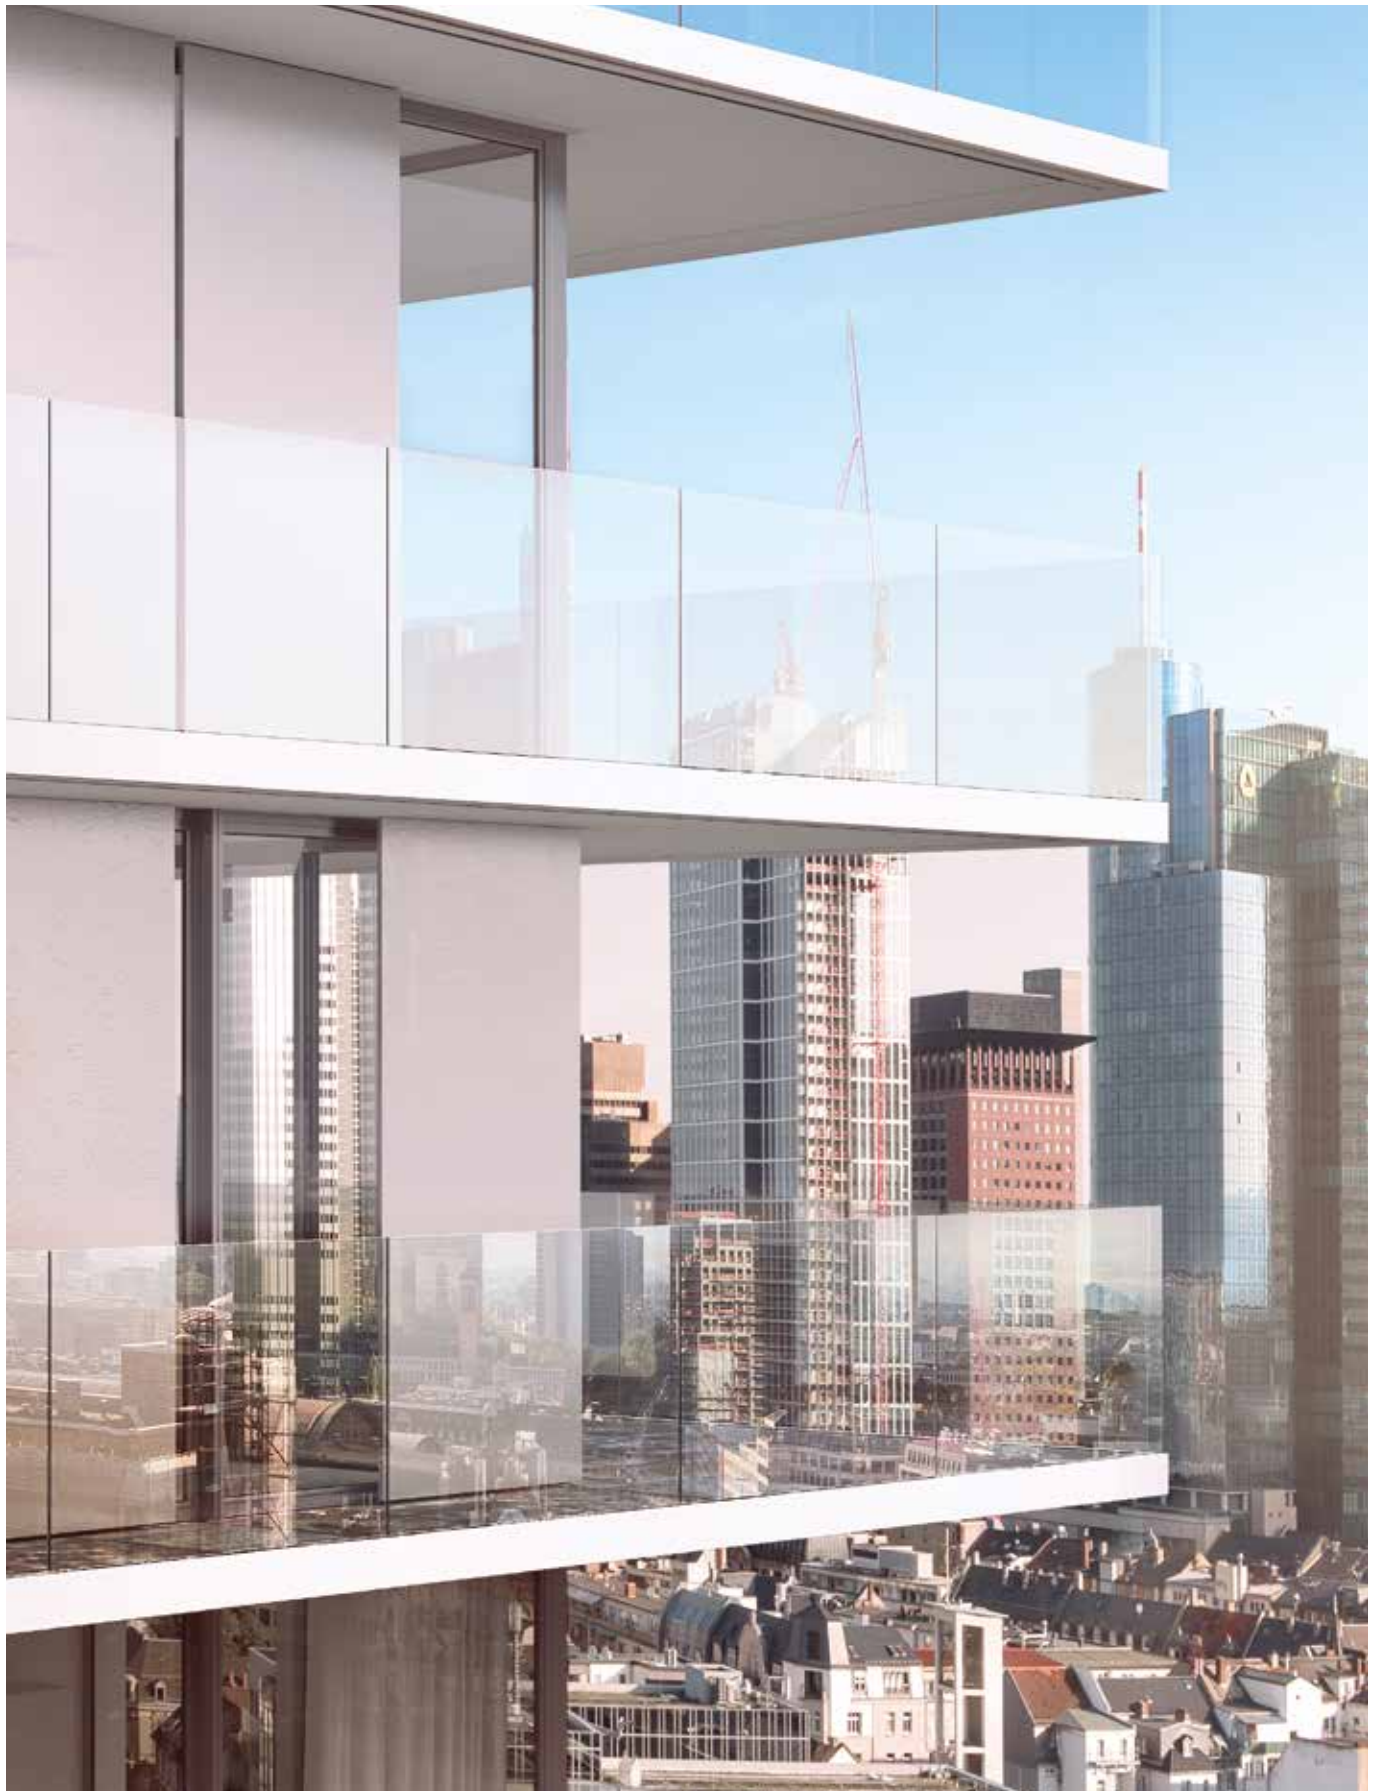

84

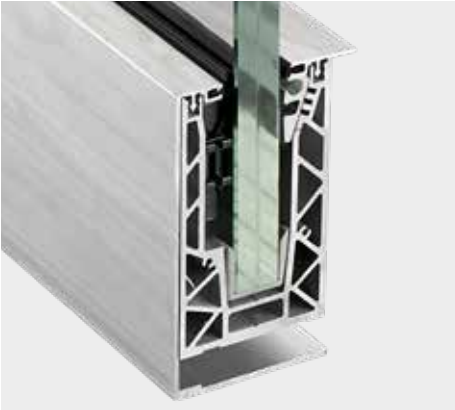

SUDEDAMOSIOS DALYS / COMPONENTS

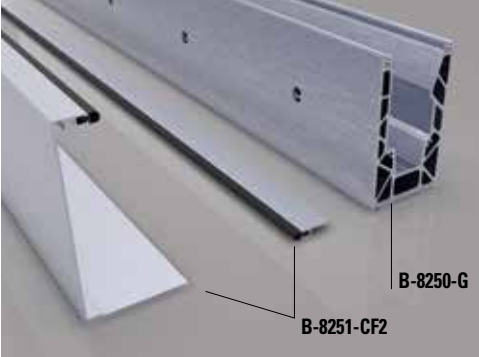


B-8250-G / B-8265-G +B-8251-CF2

- Railing profile + 2 Cover profiles
- Turėklo profilis + 2 dangtelio profiliai



B-SET-CMR-N-8 / B-SET-CMR-N-10 / B-SET-CMR-N-12

- Set clamps and gaskets
- Laikiklių ir tarpinių komplektas

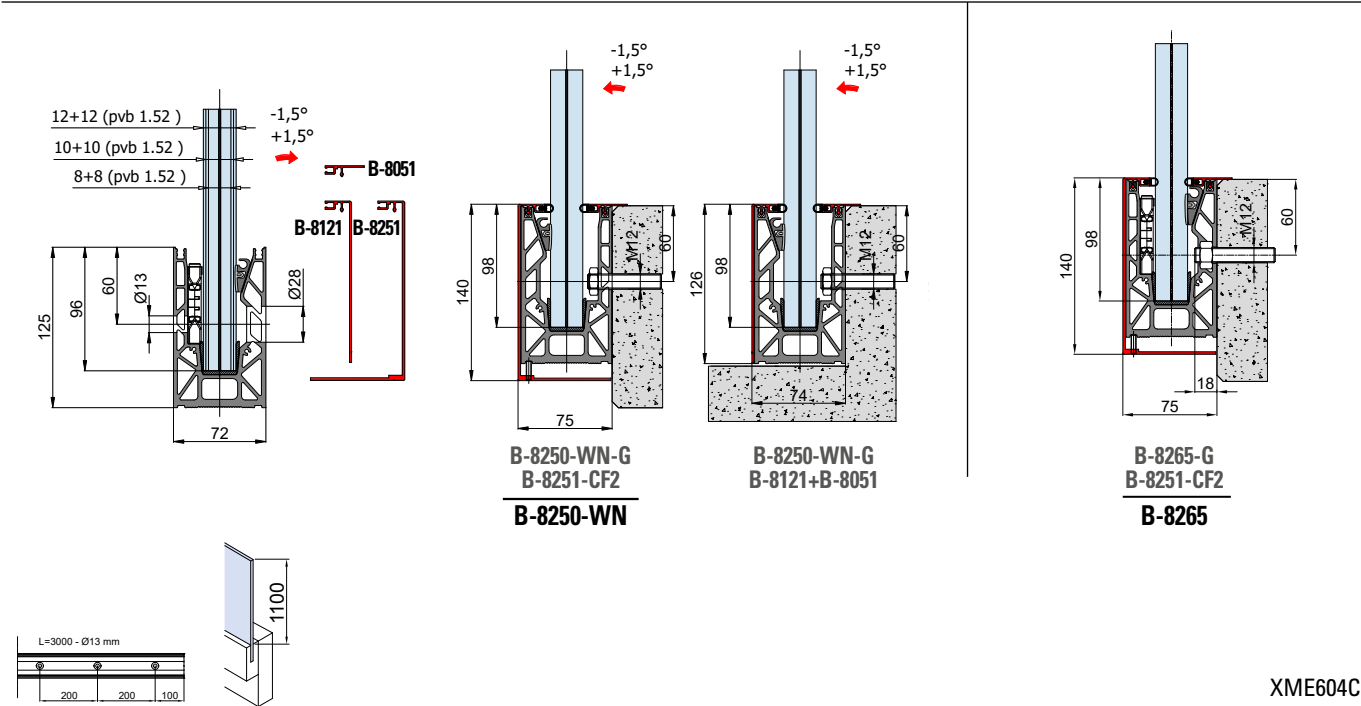

XME604C

Komplektas/m L = 3000 mm Complete set/mt L = 3000 mm	APD. / FIN. APD. FIN.	Stiklas Glass	Clamps/mt Laikikliai/m	Išbandyta horizontali apkrova Test side force	Klasė / Class UNI11678:2017
B-8250-WN-8	AN-IXE	8+8 1,52 pvb	2	150 kg	1 kN/m = 100 kg/m
B-8250-WN-10	AN-IXE	10+10 1,52 pvb	2	300 kg	2 kN/m = 200 kg/m
B-8250-WN-12	AN-IXE	12+12 1,52 pvb	4	450 kg	3 kN/m = 300 kg/m
^B-8250-WN-G-8	GR	8+8 1,52 pvb	2	150 kg	1 kN/m = 100 kg/m
^B-8250-WN-G-10	GR	10+10 1,52 pvb	2	300 kg	2 kN/m = 200 kg/m
^B-8250-WN-G-12	GR	12+12 1,52 pvb	4	450 kg	3 kN/m = 300 kg/m

^ Neapdirbtas turėklo profilis be dangtelio profilių
^ Raw balustrade profile without cover profiles