

B-8600


- Reguliuojamas turėklas.
Pasirinktinai LED atramos.
- Adjustable glass balaustrade.
Optional LED supports.



Metalglas tiekia tik sistemą. Montavimas ir tinkamas vandens nuvedimo projektavimas – užsakovo pusėje.
Metalglas supplies only the system. Installation and design of the drainage system in accordance with best practices shall be the responsibility of the client.




SUDEDAMOSIOS DALYS / COMPONENTS

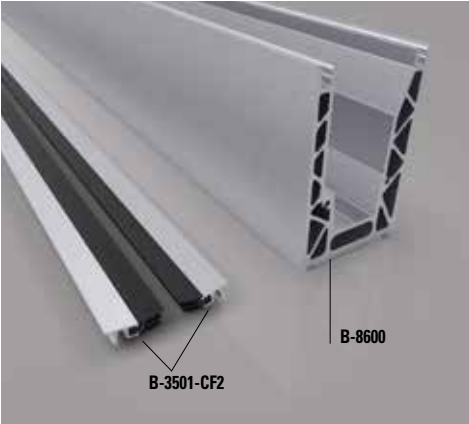




B-8600+B-3501-CF2

- Railing profile + 2 cover profiles
- Turėklo profilis + 2 dangtelio profiliai

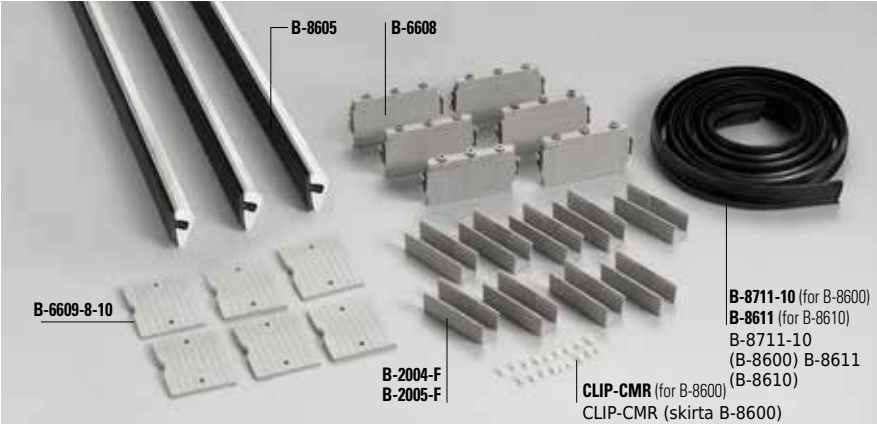

B-SET-8600-8 / B-SET-8600-10 | B-SET-8610-8 / B-SET-8610-10

- Set clamps and gaskets
- Laikiklių ir tarpinių komplektas

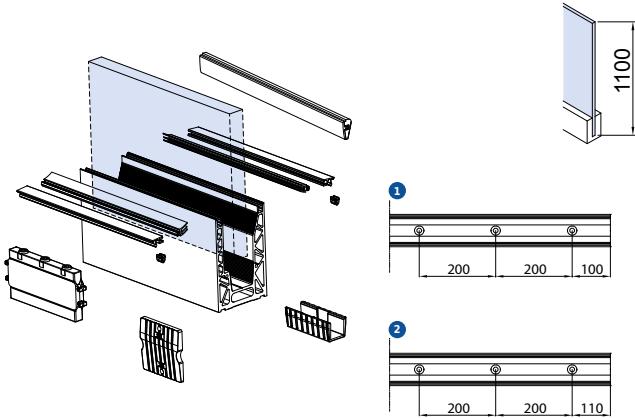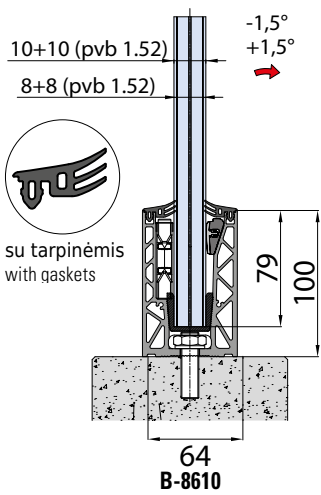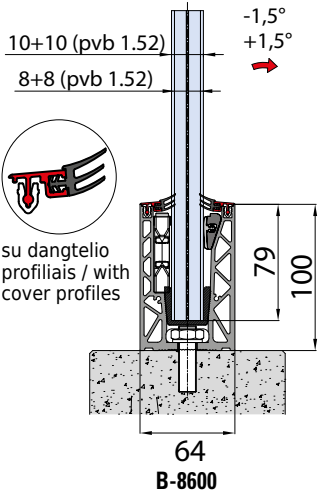

XME618A

Complete set/mt L = 3000 / 6000 mm Pilnas komplektas/m L = 3000 / 6000 mm	3 APD. FIN.	Stiklas Glass	Laikikliai/m Clamps/mt	Išbandyta horizontali apkrova Test side force	Klasė Class IT		UNI11678:2017
					H 1100 mm	H 800 mm	
B-8600 8+8	AN / GR*	8+8 1,52 pnb	2	150 kg	1	2	1 kN/m = 100 kg/m
B-8600 10+10	AN / GR*	10+10 1,52 pnb	2	200 kg	1	2	2 kN/m = 200 kg/m
B-8610 8+8	AN / GR	8+8 1,52 pnb	2	150 kg	1	2	1 kN/m = 100 kg/m
B-8610 10+10	AN / GR	10+10 1,52 pnb	2	200 kg	1	2	2 kN/m = 200 kg/m

* neapdirbtas profilis be dangtelio profilių
* raw profile without cover profiles

Brėžinio užrašai / Drawing labels

- 1 Profilio gręžimas L=3000 - Ø13 mm
- 2 Profilio gręžimas L=6020 - Ø13 mm
- 3 APD.

Profile drilling L=3000 - Ø13 mm
Profile drilling L=6020 - Ø13 mm
FIN.