


B-8700 / B-8700-G CMR

- Balastra regolabile.
Optional supporti LED.
- Adjustable railing system.
Optional LED supports.
- Verstellbares Ganzglasgeländer
System.
Optional LED Auflage.





COMPONENTS / COMPONENTES / COMPOSANTS




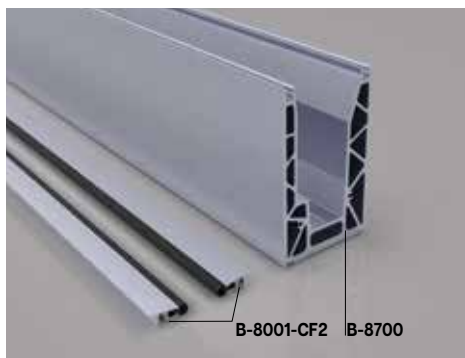


B-8700+B-8001-CF2

- Profilo balastra + 2 Vette
- Railing profile + 2 Cover profiles
- Profil für Geländer mit 2 Abdeckungen

B-SET-8700-8 / B-SET-CMR-N-10 / B-SET-8700CH-12

- Set morsetti e guarnizioni
- Set clamps and gaskets
- Set Klemmen und Dichtungen

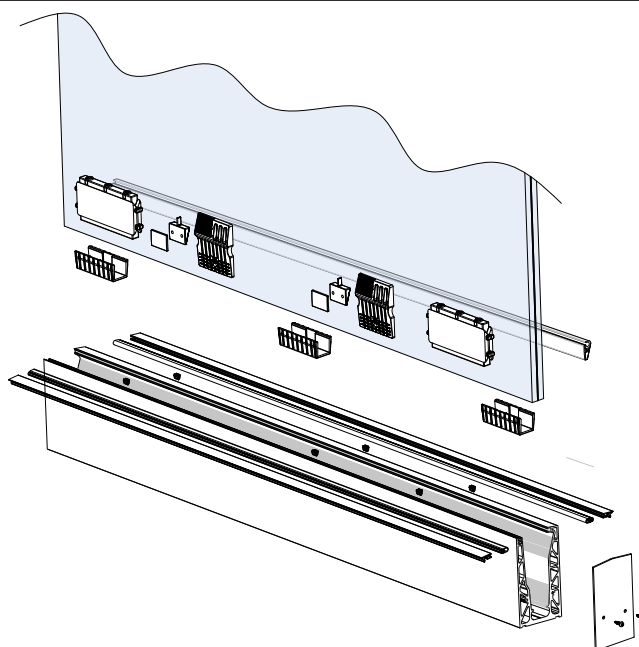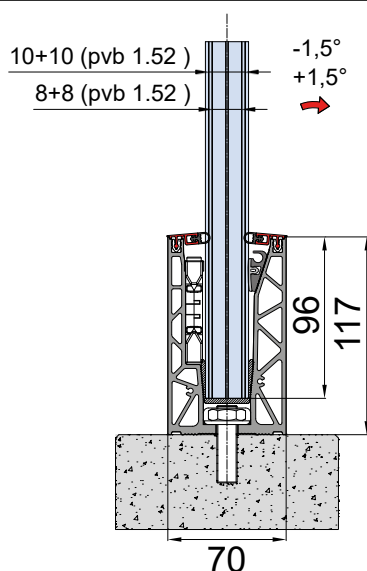

XME605A

Set completo/mt L = 3000 / 6000 mm Complete set/mt L = 3000 / 6000 mm Komplett-Set L = 3000 / 6000 mm	FIN. FIN. OB.	Vetro Glass Glas	Morsetti/mt Clamps/mt Klemmen/lfm	Testato spinta Test side force Getestete Seitenkraft	Classe Class IT Klasse	Testato Tested Bestätigte horizontale Nutzlast
B-8700-8	AN	8+8 1,52 pvb	2	150 kg	1	1 kN/m = 100 kg/m
B-8700-10	AN	10+10 1,52 pvb	2/3 [^]	300 kg/450 kg [^]	2	2 kN/m = 200 kg/m / 3 kN/m [^]
B-8700-CH-12	AN	12+12 1,52 pvb	2	240 kg	A,B,D,E,F,G, C	1,6 kN/m = 160 kg/m
*B-8700-G-8	GR	8+8 1,52 pvb	2	150 kg	1	1 kN/m = 100 kg/m
*B-8700-G-10	GR	10+10 1,52 pvb	2	300 kg	2	2 kN/m = 200 kg/m
*B-8700-G-CH-12	GR	12+12 1,52 pvb	2	240 kg	A,B,D,E,F,G, C	1,6 kN/m = 160 kg/m

* senza vette / without cover profiles / ohne Abdeckungen

[^] Class 3 = +1 B-8008 / m + 2 B-2005 / m