

B-8250-WN / B-8250-WN-G / B-8265 / B-8265-G CMR


e▶ H.25 e▶ H.26

• Balaustra a montaggio laterale regolabile.


• Adjustable railing system, side installation.

• Verstellbares Ganzglasgeländer System Seitenmontage.



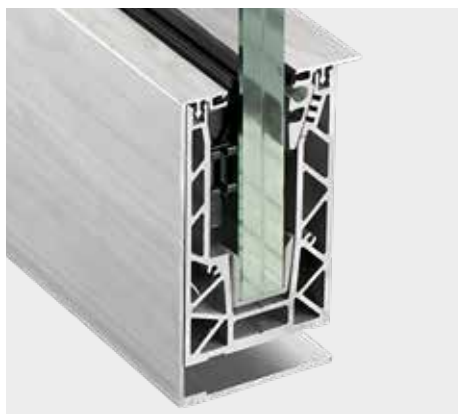


COMPONENTI / COMPONENTS / EINZELTEILE

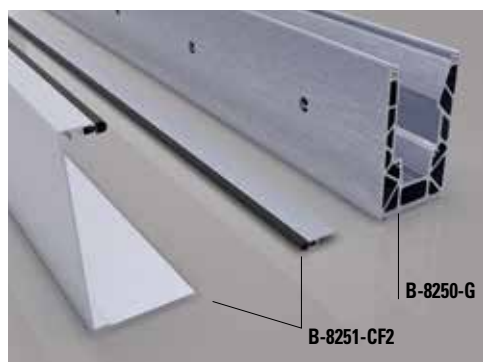






B-8250-G / B-8265-G + B-8251-CF2

- Profilo balastra + 2 Vette
- Railing profile + 2 Cover profiles
- Profil für Geländer mit 2 Abdeckungen

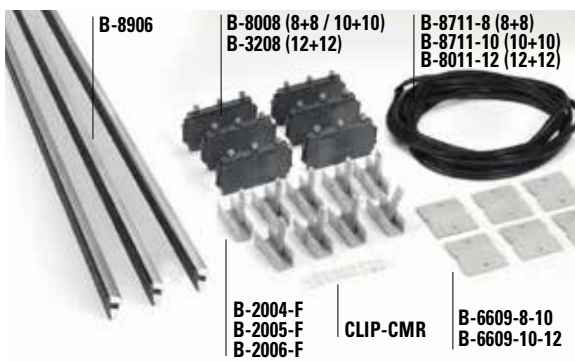

B-SET-CMR-N-8 / B-SET-CMR-N-10 / B-SET-CMR-N-12

- Set morsetti e guarnizioni
- Set clamps and gaskets
- Set Klemmen und Dichtungen

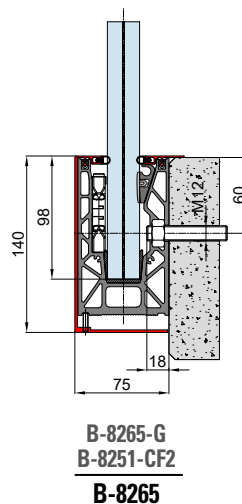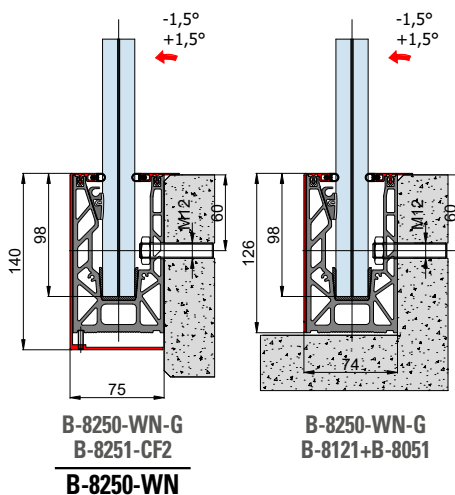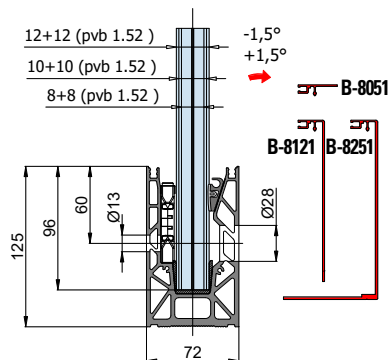

XME604C

Set completo/mt L=3000 Complete set/mt L = 3000 mm Komplett-Set L=3000 mm	FIN. FIN. OB.	Vetro Glass Glass *	Morsetti/mt Clamps/mt Klemmen/mt	Testato spinta Test side force Getestete Seitenkraft	Classe / Class / Klasse UNI11678:2017
B-8250-WN-8	AN-IXE	8+8 1,52 pvb	2	150 kg	1 kN/m = 100 kg/m
B-8250-WN-10	AN-IXE	10+10 1,52 pvb	2	300 kg	2 kN/m = 200 kg/m
B-8250-WN-12	AN-IXE	12+12 1,52 pvb	4	450 kg	3 kN/m = 300 kg/m
^B-8250-WN-G-8	GR	8+8 1,52 pvb	2	150 kg	1 kN/m = 100 kg/m
^B-8250-WN-G-10	GR	10+10 1,52 pvb	2	300 kg	2 kN/m = 200 kg/m
^B-8250-WN-G-12	GR	12+12 1,52 pvb	4	450 kg	3 kN/m = 300 kg/m

^ Profilo balastra grezzo senza vette / Raw balustrade profile without cover profiles / Rohes Geländerprofil ohne Abdeckungen